SOUTH
495 BEAUDESERT RD
MOOROOKA Q 4105
T: 07 3277 1600

NORTH
87 BASALT ST
GEEBUNG Q 4034
T: 07 3865 7544

FAB
48 LYSAGHT ST
ACACIA RIDGE Q 4110
T: 3345 8739

COAST
9 ENERGY CRES
MOLENDINAR Q 4214
T: 07 5603 3712

WWW.FIREPLUMB.COM.AU

TOOL SHOP

PRODUCTS FOR PURCHASE & HIRE

Threading Dies

Product Description

- The proven quality dies with precise cutting geometry ensure an excellent start-cutting performance, easy threading and ensure clean threads.
- Dies in a high-quality special-grade steel, fully tempered and hardened, for long life usage.
- Teeth milling process: To further improve threading performance, dies will undergo teeth milling process with special milling tool. It will improve the teeth geometry and surface.

Dies interchangeable with RIDGID type, fits ratchet threader, portable threader

Description	Size / Catalog number					
	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
NPT HSS	26251	26252	26253	26254	26255	26256
NPT Alloy	26201	26202	26203	26204	26205	26206
BSPT HSS	26151	26152	26153	26154	26155	26156
BSPT Alloy	26101	26102	26103	26104	26105	26106

Dies interchangeable with RIDGID type, fits threading machine

Description	Size / Catalog number				
	1/4"-3/8"	1/2"-3/4"	1"-2"	2 1/2"-3"	2 1/2"-4"
NPT HSS	21251	21252	21253	21254	21255
NPT Alloy	21201	21202	21203	21204	21205
BSPT HSS	21151	21152	21153	21154	21155
BSPT Alloy	21101	21102	21103	21104	21105
BSPP HSS	-	21351	21352	-	-

FPS FIREPLUMB SUPPLIES
FIREPLUMB.COM.AU
1800 377 753

Power Drive

HSQ50

Ordering Information

Catalog No.	Model No.	Description	N.W(kg)
	HSQ50	Power drive 110V-60Hz	20
	HSQ50	Power drive 220V-50Hz	20

Product Description

- The Hongli Model HSQ50 power drive, constructed with a rugged cast aluminum housing, is designed for heavy-duty applications and daily use. It is ideal for mechanical, electrical and plumbing jobs. HSQ50 can be used to actuate pipe cutter, geared threader etc.

Specifications

- **Motor:** Universal, 1500W
- **Speed:** 32RPM (no load)
- **Gear head:** All Spur-gear Reduction.
  Spring-loaded Adapter Pawl.
- **Body:** Hardened Steel Spindle Gear
  Gear Case, Motor Housing and Handle are Cast Aluminum.
- **Threading Capacity:** 1/2”-2” (die heads to order separately)
- **Length:** 72cm

Nipple Chuck

819 Nipple Chuck Kit

- Holds short or close nipples for threading.
- For use with SQ50B1, SQ50C, SQ80D, SQ80D1, SQ100D, SQ100D1, SQ50, SQ50D, SQ50E, SQ50F, SQ80C1, SQ100F.
- Standard Nipple Chuck includes insert and 5 adapters: ½", ¾", 1", 1¼", and 1½". (Nipple Chuck body serves as 2" Adapter.)

Ordering Information

Catalog No.	Model No.	Description	Pipe Capacity		N.W(kg)
			(in)	(mm)	
4581011	819	NPT Nipple Chuck	½-2	12-50	4.5
4581010	819	BSPT Nipple Chuck	½-2	12-50	4.5

Oiler

Product Description

- To work with portable threaders or other manual oilling required applications.
- Oil is filtered and recirculated through reservior.
- An ergonomic 2-finger trigger design that reduces user fatigue.

Ordering Information

Catalog No.	Model No.	Description	N.W (kg)
		Oiler Complete	5
		Oiler Gun with Hose	2

FPS FIREPLUMB SUPPLIES
FIREPLUMB.COM.AU
1800 377 753

Threading and Grooving

SQ30-2B

Product Description

- The SQ30-2B is a light weight and powerful portable threader. It is designed for threading ½”-2” pipe with 11-R Die Heads. The SQ30-2B is equipped with a full set of 11-R Die Heads, ½”-2”, the SQ30-2B Support Arm and a durable Carrying Case. The SQ30-2B Power Drive is the perfect light weight and portable power drive for maintance and repair workers, as well as service plumbers requiring 2” pipe capacity.

Specifications

- **Capacity:** ½”-2” (15mm-50mm) pipe
- **Motor:** 1350W Universal 110V or 220V, 50/60Hz.
- **Switch:** Heavy-duty paddle-type switch with safety lock off device (automatically locks off when released). Separate mechanical transmission FOR/REV switch. Reverse 3-times faster than threading.
- **Gear Head:** Spur gear reduction/ring gear drive. All shafts, ball and needle bearing mounted. Permanently lubricated gear housing.
- **Gear Housing:** Die cast Aluminum.
- **Body & Handle:** Durable heavy-duty fiberglass reinforced plastic.
- **Spindle Speed:** 28 RPM for threading, 51 RPM reverse (No load)
- **Die Heads:** ½”, ¾”, 1”, 1¼”, 1½”, 2” (Type 11R)
- Includes support arm.
- **Screw Threads:** NPT / BPST
- **Dies Material:** Alloy standard, (HSS optional)
- **Die Head Adapter:** Used with ½” through 1¼” die heads.
- **N.W:** 8 kg, power drive only.
- **Length:** 76 cm
- Approved by CSA and CE strandards

Model SQ30-2B with Support Arm, Die Heads and Carring Case

Ordering Information

Catalog No.	Model No.	Description	N.W(kg)
31002	SQ30-2B	110V ½”-2” NPT w/Case and Support Arm	
31001	SQ30-2B	220V ½”-2” BSPT w/Case and Support Arm	
Accessories			
		Adapter	
		Support Arm	
		Oiler (optional)	
	H401	1/8”-6” TRISTAND chain vise (optional)	

Model SQ30-2B operating

FPS FIREPLUMB SUPPLIES
FIREPLUMB.COM.AU
1800 377 753

Power Drive

SQ50D

Features

- Speed Chuck
- Reversible 1500W universal motor.
- Capacity: ¼”-2” (8mm-50mm) pipe, M12-M52 rod.
- Recessed On/Off/Reverse switch.
- Approval by CSA and CE standards.
- Ideal for use with roll groovers.
- Convert a SQ50D Power Drive to a portable Threading Machine.

Specifications

- **Motor:** 1500W Universal, reversible motor, single-phase, 110V or 220V, 50/60Hz.
- **Switch:** Heavy-duty FOR/OFF/REV and Integral Foot Switch.
- **Chuck:** Speed chuck with replaceable rocker-action jaws.
- **Spindle Speed:** 38 RPM (57 RPM available)
- **Rear Centering Device:** Cam-action turns with chuck.
- **Support Bar:** Heavy-duty

Accessories

Catalog No.	Model No.	Description	N.W(kg)
	660	Stand for SQ50D Power Drive	
	32	Transporter (for Power Drives and Tristand Vises)	
	425	Die head, Quick-open (standard)	
	424	Die head, Self-open (optional)	
	227	Carriage with Lever	
		Oiler	
	524	Reamer	
	624	Cutter	
4581011	819	Nipple Chuck (optional)	

Ordering Information

Catalog No.	Model No.	Description	Spindle Speed RPM	N.W(kg)
37012	SQ50D only	110V, 50/60Hz	38	
37014	SQ50D only	110V, 50/60Hz	57	
37011	SQ50D only	220V, 50/60Hz	38	

FPS FIREPLUMB SUPPLIES
FIREPLUMB.COM.AU
1800 377 753

Threading Machine Complete

Model SQ50D with "T" Transporter

SQ50D

Standard Equipment

- Model SQ50D Power Drive with foot switch
- Quick-open die head, universal
- ½"-¾" universal HSS dies set.
- 1"-2" universal HSS dies set.
- **Cutter:** Capacity: 1/8"-2"(6mm-50mm) pipe
- **Reamer:** Positive-locking, 5-flute cone, right-hand 1/8"-2" (6mm-50mm).
- Carriage with lever.
- TRIPOD support stand
- Oiler

Ordering Information

Catalog No.	Model No.	Description	Spindle Speed RPM	Pipe Threading Capacity		Rod Threading Capacity	N.W(kg)
				in.	mm.	metric	
37012	SQ50D complete	110V, 50/60Hz	38	¼-2	6-50	M12-M52	
37014	SQ50D complete	110V, 50/60Hz	57	¼-2	6-50	M12-M52	
37011	SQ50D complete	220V, 50/60Hz	38	¼-2	6-50	M12-M52	

FPS FIREPLUMB SUPPLIES
FIREPLUMB.COM.AU
1800 377 753

Compact Threading Machine

Capacity

- **Pipe:** ¼”-2”(6mm-50mm)
- **Bolt:** 12mm-52mm

Features

- Heavy-duty proven performance.
- Light weight, portable design.
- Fast transport and set-up.
- Self-Contained Oil System with adjustable flow control.
- Approved by CSA and CE standards.

Technical Specifications

- **Motor:** 1500W universal, 50/60Hz
- **Switch:** ON/OFF heavy duty switch, foot switch and FOR/OFF/REV switch are optional
- **Spindle Speed:** 38 RPM.
- **Front Chuck:** Hammer type with replaceable rocker action jaw inserts.
- **Rear Centering Device:** Cam action.
- **Oiling System:** Through die head, with integral oil reservoir.
- **Pump:** Self-priming constant flow, gerotor pump.

Standard Equipment

- Model SQ50E Threading Machine.
- Self-opening die head.
- ½”-¾” universal HSS dies set.
- 1”-2” universal HSS dies set.
- **Cutter:** Capacity: 1/8”-2”(3mm-50mm) pipe
- **Reamer:** Positive-locking, 5-flute cone, right-hand 1/8”-2”(3mm-50mm).

Ordering Information

Catalog No.	Model No.	Description	Spindle Speed RPM	Pipe Threading Capacity		Rod Threading Capacity	N.W (kg)
				in.	mm.	metric	
38002	SQ50E	110V, 50/60Hz	38	¼-2	6-50	M12-M52	
38001	SQ50E	220V, 50/60Hz	38	¼-2	6-50	M12-M52	

Accessories

Catalog No.	Model No.	Description	N.W (kg)
	425	Die head, Quick-open (optional)	
	424	Die head, Self-open (standard)	
	525	Reamer	
	624	Cutter	
	42	Foot Pedal Switch (optional)	
4581011	819	Nipple Chuck (optional)	
38800	651	Pneumatic Folding Wheel Stand (optional)	

FPS FIREPLUMB SUPPLIES
FIREPLUMB.COM.AU
1800 377 753

Threading Machine

Capacity

- **Pipe:** ¼”-4”(6mm-100mm)
- **Bolt:** 12mm-52mm

Features

- Heavy-duty proven performance.
- Threads ¼”-¾” pipe at 36RPM, 1”-2” at 20RPM, 2½”-4” at 11RPM.
- An induction motor ensures sound levels well when using.
- A special capacitor-start / capacitor run motor allows the machine to thread where voltage drop is experienced.
- ¼”-2” universal Die Head; 2½”-4” receding die head allows cutting of tapered or straight NPT/NPSM or BSPT/BSPP threads.
- Approved by CSA and CE standards.

Technical Specifications

- **Motor:** 1500W induction, 50/60Hz, single phase.
- **Switch:** ON/OFF heavy duty switch, foot switch and FOR/OFF/REV switch is optional
- **Spindle Speed:** 36/20/11 RPM.
- **Front Chuck:** Hammer type with replaceable rocker action jaw inserts.
- **Rear Centering Device:** Cam action.
- **Oiling System:** Through die head, with intergral oil reservoir.

Standard Equipment

- Model SQ100F threading machine.
- Self-open die head, 1/4”-2”
- Receding self-open die head, 2 1/2”-4”
- ½”-¾” universal HSS dies set.
- 1”-2” universal HSS dies set.
- 2 1/2”-4” universal HSS dies set.
- **Cutter:** Capacity: 1/4”-4”(6mm-100mm) pipe
- **Reamer:** Positive-locking, right-hand 1/4”-4”(6mm-100mm).

Ordering Information

Catalog No.	Model No.	Description	Spindle Speed RPM	Pipe Threading Capacity		Rod Threading Capacity	N.W (kg)
				in.	mm.	metric	
43002	SQ100F	110V, 50/60Hz	36/20/11	¼-4	6-100	M12-M52	
43001	SQ100F	220V, 50/60Hz	36/20/11	¼-4	6-100	M12-M52	

Other voltages available upon request.

Accessories

Catalog No.	Model No.	Description	N.W(kg)
	443	Die head, Self-open, ¼”-2”	
	444	Die head, Self-open, 2½”-4”	
		Die head, Bolt, Self-open (optional)	
	544	Reamer	
	642	Cutter	
	42	Foot Pedal Switch (optional)	
4581011	819	Nipple Chuck (optional)	

FPS FIREPLUMB SUPPLIES
FIREPLUMB.COM.AU
1800 377 753

Grooving

YG6C

Model YG6C Hydraulic Roll Groover

Product Description

- The Model YG6C hydraulic roll groover, powered by 450W indcution motor, is capable of grooving up to 6" Sch 10 and 3" Sch 40 standard wall pipes. "All in one" design of drive shaft for convenient replacement changing. The YG6C comes with standard support legs, the unit can be set up quickly. The induction motor ensures steady and quiet working.

Technical Specifications

- **Motor:** 450W induction, 50/60Hz
- **Switch:** ON/OFF heavy duty switch.
- **Spindle Speed:** 24 RPM
- **Capacity:** 1¼"-6" Sch. 10 steel, stainless steel.
  1¼"-3" Sch. 40 steel, stainless steel.
- **N.W:** 80 kg

1 1/4"-1 1/2" Roller and Shaft

Standard Equipment

- Model YG6C grooving machine.
- One 1¼"-1½" Schedule 10/40 Roll Set for steel.
- One 2"-6" Schedule 10 (3" Schedule 40) Roll Set for steel.
- Model 1106 Pipe Support Stand.

2"-6" Roller and Shaft

Ordering Information

Catalog No.	Model No.	Description	N.W(kg)
65001	YG6C	Hydraulic Roll Groover, 220V/50Hz	80
65002	YG6C	Hydraulic Roll Groover, 110V/60Hz	80
Accessories			
	--	Roll Set for 1¼"-1½"	
		Roll Set for 2"-6"	
4021110	1106	Pipe support stand	14

Model 1106 Pipe Support Stand

FPS FIREPLUMB SUPPLIES
FIREPLUMB.COM.AU
1800 377 753

Threading and Grooving

Grooving

Product Description

- The Model YG6D hydraulic roll groover, powered by 450W indcution motor, is capable of grooving up to 6" Sch 10 and 3" Sch 40 standard wall pipes. "Separate knurling roller" design of drive shaft for convenient replacement changing. The YG6D comes with standard support legs, the unit can be set up quickly. The induction motor ensures steady and quiet working.

Model YG6D Hydraulic Roll Groover

Technical Specifications

- **Motor:** 450W induction, 50/60Hz
- **Switch:** ON/OFF heavy duty switch.
- **Spindle Speed:** 24 RPM
- **Capacity:** 2"-6" Sch. 10 steel, stainless steel.
  2"-3" Sch. 40 steel, stainless steel.
- **N.W:** 66 kg

Roller and knurling roll

Standard Equipment

- Model YG6D grooving machine.
- One 2"-6" Schedule 10 (3" Schedule 40) Roll Set for steel.
- Model 1106 Pipe Support Stand.

Ordering Information

Catalog No.	Model No.	Description	N.W(kg)
66003	YG6D	Hydraulic Roll Groover, 110V/60Hz	66
66001	YG6D	Hydraulic Roll Groover, 220V/50Hz	66
Accessories			
		Roll Set for 2"-6"	
4021110	1106	Pipe support stand	14

Model 1106 Pipe Support Stand

FPS FIREPLUMB SUPPLIES
FIREPLUMB.COM.AU
1800 377 753

grooving operation

YG12C

Model YG12C Hydraulic Roll Groover

Product Description

- The Model YG12C hydraulic roll groover, powered by 750W induction motor, is capable of grooving up to 12” Sch 10 and 6” Sch 40 standard wall pipes. “Separate knurling roller” design of drive shaft for convenient replacement changing. The YG12C comes with standard support legs, the unit can be set up quickly. The induction motor ensures steady and quiet working.

Technical Specifications

- **Motor:** 750W induction, 50/60Hz
- **Switch:** ON/OFF heavy duty switch.
- **Spindle Speed:** 24 RPM
- **Capacity:** 2”-12” Sch. 10 steel, stainless steel.
  2”-6” Sch. 10/ 40 steel, stainless steel.
- **N.W:** 120 kg

Standard Equipment

- Model YG12C grooving machine.
- One 2”-6” Schedule 10/40 Roll Set for steel.
- One 8”-12” Schedule 10 Roll Set for steel.
- Model 1106 Pipe Support Stand.

Roller

2"-6" 8"-12"

Knurling Roller

2"-3" 4"-6" 8"-12"

Ordering Information

Catalog No.	Model No.	Description	N.W(kg)
69003	YG12C	Hydraulic Roll Groover, 220V/50Hz	120
69001	YG12C	Hydraulic Roll Groover, 110V/60Hz	120
Accessories			
	--	Roll Set for 2”-6”	
	--	Roll Set for 8”-12”	
4021110	1106	Pipe support stand	14

Model 1106 Pipe Support Stand

FPS FIREPLUMB SUPPLIES
FIREPLUMB.COM.AU
1800 377 753

Threading and Grooving

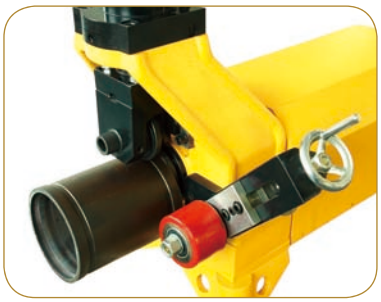

grooving operation

YG12D

Model YG12D Hydraulic Roll Groover

Product Description

- The Model YG12D hydraulic roll groover, equips updated hydraulic pump, with convenient depth adjusting function, powered by 1100W induction motor, is capable of grooving 2”- 12” Sch 10 and 2”- 6” Sch 40 standard wall pipes. “Separate knurling roller” design of drive shaft for convenient replacement changing. The YG12D comes with standard support legs, the unit can be set up quickly. The induction motor ensures steady and quiet working.

Technical Specifications

- **Motor:** 1100W induction, 50/60Hz
- **Switch:** ON/OFF heavy duty switch.
- **Spindle Speed:** 24 RPM
- **Capacity:** 2”-12” Sch. 10 steel, stainless steel.
  2”-6” Sch. 10/ 40 steel, stainless steel.
- **N.W:** 140 kg

Standard Equipment

- Model YG12D grooving machine.
- One 2”-6” Schedule 10/40 Roll Set for steel.
- One 8”-12” Schedule 10 Roll Set for steel.
- Model 1106 Pipe Support Stand.

Knurling Roller

2"-3" 4"-6" 8"-12"

Roller

2"-6" 8"-12"

Model 1106 Pipe Support Stand

Ordering Information

Catalog No.	Model No.	Description	N.W(kg)
71003	YG12D	Hydraulic Roll Groover, 110V/60Hz	140
71001	YG12D	Hydraulic Roll Groover, 110V/60Hz	140
Accessories			
	--	Roll Set for 2”-6”	
	--	Roll Set for 8”-12”	
4021110	1106	Pipe support stand	14

FPS FIREPLUMB SUPPLIES
FIREPLUMB.COM.AU
1800 377 753

Hole saws

Product Description

- Excellent performance and long-lasting life.
- Bi-metal construction with teeth made from specially hardened M3 or M42 high speed steel. The varying teeth height and gullet sizes result in much faster cutting and longer life. Suitable for various material like mild steel, tool and stainless steel, brass, aluminum, wood. Size ranges from 14mm to 210mm.
- Depth of cut: 38mm
- Use high quality thread cutting oil on all metal except cast iron

Ordering Information

Model No.	Sizes (mm)	Applicable arbor
H14	14	A1
H16	16	A1
H17	17	A1
H19	19	A1
H20	20	A1
H21	21	A1
H22	22	A1
H24	24	A1
H25	25	A1
H27	27	A1
H29	29	A1
H30	30	A1
H32	32	B1
H33	33	B1
H35	35	B1
H37	37	B1
H38	38	B1
H40	40	B1
H41	41	B1
H43	43	B1

Model No.	Sizes (mm)	Applicable arbor
H44	44	B1
H46	46	B1
H48	48	B1
H51	51	B1
H52	52	B1
H54	54	B1
H57	57	B1
H59	59	B1
H60	60	B1
H64	64	B1
H65	65	B1
H67	67	B1
H68	68	B1
H70	70	B1
H73	73	B1
H76	76	B1
H79	79	B1
H83	83	B1
H86	86	B1
H89	89	B1

Model No.	Sizes (mm)	Applicable arbor
H92	92	B1
H95	95	B1
H98	98	B1
H102	102	B1
H105	105	B1
H108	108	B1
H111	111	B1
H114	114	B1
H121	121	B1
H127	127	B1
H133	133	B1
H140	140	B1
H146	146	B1
H152	152	B1
H160	160	B1
H165	165	B1
H168	168	B1
H177	177	B1
H200	200	B1
H210	210	B1

FPS FIREPLUMB SUPPLIES
FIREPLUMB.COM.AU
1800 377 753

Hydraulic Power Pipe Cutters

Ball Bearing Pipe Support for QG8C

Product Description

- The Model QG8C Hydraulic Power Pipe Cutter cuts 2" to 8" schedule 10/40, steel pipe, galvanized pipe at the job site or in the shop. The operator controls the feeding rate by pumping the hydraulic hand pump throughout the operation. The QG8C cuts pipes with clean cutting edge, no sparks, dust or open flame. The processed pipes can be threaded or grooved with no extral processing. An induction motor ensures very quiet operation.

QG8C

Features

- Easily cuts by displacing instead of removing pipe material.
- No abrasive dust, dangerous sparks, or open flame.
- Quickly cuts steel pipe with minimal burr.
- Great for cutting pipe for groove joining.
- Heavy-duty design is perfect for field or shop use.
- Quiet operation.

Model QG8C Hydraulic Power Pipe Cutter

Specifications

- **Cutting Capacity:** 2" to 8" schedule 10/40
- **Motor:** 450W induction, 50/60Hz
- **Spindle Speed:** 24 RPM
- **Switch:** ON/OFF heavy duty switch

Ordering Information

Catalog No.	Model No.	Description	N.W(kg)
75003	QG8C	Hydraulic Power Pipe Cutter, 110V/60Hz	65
75001	QG8C	Hydraulic Power Pipe Cutter, 220V/50Hz	65
Accessories			
	--	Cutting Wheel	
	--	Ball Bearing Pipe Support for QG8C	6

FPS FIREPLUMB SUPPLIES
FIREPLUMB.COM.AU
1800 377 753

Cutting, Drilling and Beveling

QG12C

Product Description

- The Model QG12C Hydraulic Power Pipe Cutter offers 2½" to 12" schedule 10/40 cutting range. Utilizing displacement type cutter wheel technology. The operator controls the feeding rate by pumping the hydraulic hand pump through-out the operation. The QG12C cut pipes with clean cutting edge, no sparks, dust or open flame. The processed pipes can be threaded or grooved with no extral processing. An induction motor ensures very quiet operation.

Model QG12C Hydraulic Power Pipe Cutter

Features

- Easily cuts by displacing instead of removing pipe material.
- No abrasive dust, dangerous sparks, or open flame.
- Quickly cuts steel pipe with minimal burr.
- Great for cutting pipe for groove joining.
- Heavy-duty design is perfect for field or shop use.
- Quiet operation.

Specifications

- **Cutting Capacity:** 2½" to 12" schedule 10/40
- **Motor:** 750W induction, 50/60Hz
- **Spindle Speed:** 24 RPM
- **Switch:** ON/OFF heavy duty switch

Ordering Information

Catalog No.	Model No.	Description	N.W(kg)
76003	QG12C	Hydraulic Power Pipe Cutter, 110V/60Hz	120
76001	QG12C	Hydraulic Power Pipe Cutter, 220V/50Hz	120
Accessories			
	--	Cutting Wheel	
4021010	--	Ball Bearing Pipe Support for QG12	11

Ball Bearing Pipe Support for QG12C

FPS FIREPLUMB SUPPLIES
FIREPLUMB.COM.AU
1800 377 753

DQX-60

Product Description

- With brass double outlet cylinder
- Brass piston pump
- Bending metal gun with nozzle
- Standard with pressure gauge
- Auto shut off function optional
- Trigger gun optional

Specifications

- **Pressure:** 40bar /580psi
- **Flow Rate:** 6Lpm /2.4Gpm
- **R. P. M:** 1430r/min
- **Plunger Diameter:** 25mm
- **Stroke:** 4mm
- **Pump:** brass piston pump
- **Drive:** Direct
- **Power:** 400W
- **High Pressure Gun:** Metal Gun
- **High Pressure Hose:** Ø14mmx10m
- **Size:** 39×29×29cm
- **N. W/G. W:** 17/18kg

Ordering Information

Catalog No.	Model No.	Description
2043320	DQX-60	580psi electric high pressure washing machine, AC220V
2043310	DQX-60	580psi electric high pressure washing machine, AC110V
2043321	DQX-60	580psi electric high pressure washing machine, AC240V

Pipe and Installation Tools

Product Description

- For quick and exact compression testing.
- For testing of leaks in installations, especially for use in heating, compressed air, refrigeration systems, oil installations, sprinkler systems and other small bore pipe applications.

Specifications

- **Model:** HSY30-5
- **Testing range:** 0-60bar(860psi, 6Mpa)
- **Tank capacity:** 12L
- **Flow:** ≈45ml / stroke
- **Connections:** 1/2" BSPP
- **Valve material:** brass
- **Tank material:** steel
- Solid handle
- **Accessories:** pressure hose, pressure gauge, seal set

Electric Test Pump

Product Description

- Suitable for water or hydraulic oil as medium, for all kinds of pressure vessel, pipe, valves, pressure test, etc. Also used for the hydraulic energy, provide the required pressure, suitable for chemical industry, building, water, oil, coal, metallurgy, shipbuilding and other industries.
- With compact reasonable structure, the test pump is easy to operate, and light weight for carry.
- Convenient maintenance, DSY-series electric test pump is driven by motor, greatly improving work efficiency.

Specifications

- **Model:** DSY60
- **Testing range:** 0-60bar(860psi, 6Mpa)
- **Water flow:** 2.9L/min
- **Valve:** brass, single type
- **Connections:** 1/2" BSPP
- **Power:** 250W induction type
- **Accessories:** pressure hose, pressure gauge, seal set

Specifications

- **Model:** DSY60A
- **Testing range:** 0-60bar(860psi, 6Mpa)
- **Water flow:** 6L/min
- **Valve:** brass, single type
- **Connections:** 1/2" BSPP
- **Power:** 400W induction type
- **Accessories:** pressure hose, pressure gauge, seal set

Operation display

Ordering Information

Catalog No.	Description	N.W(kg)
3521320	DSY60 pressure test pump, 220V-50Hz	12
3521310	DSY60 pressure test pump, 110V-60Hz	
3521420	DSY60A pressure test pump, 220V-50Hz	17.5
3521410	DSY60A pressure test pump, 110V-60Hz	

Packaging and accessories

FPS FIREPLUMB SUPPLIES
FIREPLUMB.COM.AU
1800 377 753

Pipe Stands

Product Description

- The heavy-duty adjustable pipe stands are available in varying configurations with capacity from 1/8”-12” (3mm-300mm); suitable for use with threading machine, roll groovers, etc.

1107

1107S

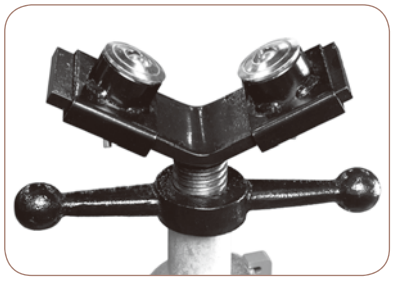

A-Ball Transfer Head

B-Ball Transfer Head

V Head Pipe Stands

Catalog No.	Model No.	Description	Height Adjustment Low-High		Max. Pipe Capacity		Max. Weight Capacity		N.W
			in.	cm	in.	mm	lb.	kg	kg
4021210	1107	V Head High Pipe Stand	28-52	71-132	12	300	2500	1134	14.5
4021310	1107S	V Head Low Pipe Stand	24-40	61-102	12	300	2500	1134	11.5

Ball Transfer Head

Catalog No.	Model No.	Description	Height Adjustment Low-High		Max. Pipe Capacity		Max. Weight Capacity		N.W
			in.	cm	in.	mm	lb.	kg	kg
4021217	A	Ball Transfer Head only	--	--	12	300	1000	454	1.5
4021218	B	Ball Transfer Head only	--	--	12	300	2000	900	2.8

Pipe Stands

1105

1106

1109

Support Stand for Groovers

Catalog No.	Model No.	Description	Height Adjustment Low-High		Max. Pipe Capacity		Max. Weight Capacity		N.W
			in.	cm	in.	mm	lb.	kg	kg
4021010	1105	Stand for Cutter	9-16	23-41	12	300	660	300	

Support Stand for Groovers

Catalog No.	Model No.	Description	Height Adjustment Low-High		Max. Pipe Capacity		Max. Weight Capacity		N.W
			in.	cm	in.	mm	lb.	kg	kg
4021110	1106	Stand for Cutter	13-23	33-58	12	300	1320	600	

Roller Head Pipe Stand

Catalog No.	Model No.	Description	Height Adjustment Low-High		Max. Pipe Capacity		Max. Weight Capacity		N.W
			in.	cm	in.	mm	lb.	kg	kg
4021410	1109	Roller Head Pipe Stand	32-55	82-140	12	300	1000	454	15

FPS FIREPLUMB SUPPLIES
FIREPLUMB.COM.AU
1800 377 753

HIRE AVAILABLE

Hinged Pipe Cutters

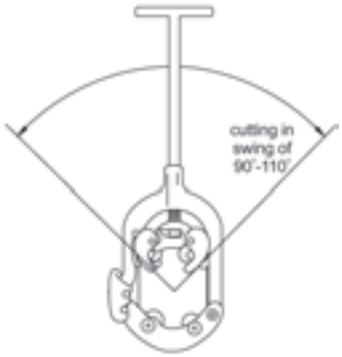

H4S H6S H8S

Product Description

- Designed for rapid cutting of 2” through 8” steel pipe, heavy-wall steel pipe and cast-iron pipe.
- The cutters operate with minimal cutter rotation (90-110 degree) as necessary for tight quarters.
- During cutting operation, there is no sparks, serving jobs with such special requirements.
- Portable and light weight, easy for transportaion.

Ordering Information

Catalog No.	Model No.	Description	Pipe Capacity		N.W(kg)
			in.	mm.	
89100	H4S	For Steel Pipe	2-4	50-100	6.5
89200	H6S	For Steel Pipe	4-6	100-150	9
89300	H8S	For Steel Pipe	6-8	150-200	12

FPS FIREPLUMB SUPPLIES
FIREPLUMB.COM.AU
1800 377 753

Pipe Vises

H402 Bench Chain Vise

H40-A Portable Tristand Yoke Vise

Product Description

- Models H401 and H40-A include intergral legs and tray fold in for easy carring and setup. Large vise base over-hangs front legs for clear tool swing. Casting Aluminum base, lightweight but strong enough.
- Models H401 and H40-A include slots for hanging tools, pipe rest, three-pipe benders, and ceiling brace screw.
- Models H401 and H402 Crank handle is anchored to base.
- Model H401 features a larger work surface.
- Model H402 Rugged cast-iron base has handy pipe rest and bender.

H401 Portable Tristand Chain Vise

Ordering Information

Catalog No.	Model No.	Description	Pipe Capacity		N.W
			in.	mm	kg
88200	H401	Portable Tristand Chain Vise	1/8-6	3-150	20
4551210	H40-A	Portable Tristand Yoke Vise	1/8-2½	3-60	20
88300	H402	Top Screw Bench Chain Vise	1/8-6	3-150	7

FPS FIREPLUMB SUPPLIES
FIREPLUMB.COM.AU
1800 377 753

Threading and Grooving

grooving operation

YG12D

Model YG12D Hydraulic Roll Groover

Product Description

- The Model YG12D hydraulic roll groover, equips updated hydraulic pump, with convenient depth adjusting function, powered by 1100W induction motor, is capable of grooving 1”- 12” Sch 10 and 1”- 6” Sch 40 standard wall pipes. “All-in-one” design for the drive shaft, suitable for heavy duty jobs. The YG12D comes with standard support legs, the unit can be set up quickly. The induction motor ensures steady and quiet working.

Technical Specifications

- **Motor:** 1100W induction, 50/60Hz
- **Switch:** ON/OFF heavy duty switch.
- **Spindle Speed:** 24 RPM
- **Capacity:** 1”-12” Sch. 10 steel, stainless steel.
  1”-6” Sch. 10/ 40 steel, stainless steel.
- **N.W:** 140 kg

Standard Equipment

- Model YG12D grooving machine.
- One 2”-6” Schedule 10/40 Roll Set for steel.
- One 8”-12” Schedule 10 Roll Set for steel.
- Model 1106 Pipe Support Stand.

Roller

1"-1 1/2" (optional) 2"-6" 8"-12"

Drive shaft

1" (optional) 1 1/4"-1 1/2" (optional) 2"-6" 8"-12"

Ordering Information

Catalog No.	Model No.	Description	N.W(kg)
71003	YG12D	Hydraulic Roll Groover, 110V/60Hz	140
71001	YG12D	Hydraulic Roll Groover, 220V/50Hz	140
Accessories			
	--	Roll Set for 1”(optional)	
	--	Roll Set for 1 1/4”-1 1/2”(optional)	
	--	Roll Set for 2”-6”	
	--	Roll Set for 8”-12”	
4021110	1106	Pipe support stand	14

Model 1106 Pipe Support Stand

FPS FIREPLUMB SUPPLIES
FIREPLUMB.COM.AU
1800 377 753

DEWALT

FPS FIREPLUMB SUPPLIES
FIREPLUMB.COM.AU
1800 377 753

WORLD'S FIRST

SAW BLADES

XR FLEXVOLT
POWER OF CORDED | FREEDOM OF CORDLESS

2 x 54V XR FLEXVOLT 305MM SLIDING MITRE SAW

DHS780T2A-XE

Power Input	2 x 54V Cordless or 230V AC
Blade Speed	3800RPM
Blade Diameter	306mm
Blade Bore	25.4mm
Mitre Capacity	60/50°
Bevel Capacity	49/49°
Max. Depth of Cut	170mm
Width x Height x Depth	770 x 369 x 470mm
Weight	25kg

	X	Y	X	Y	X	Y
90° 90°	303 mm	110 mm	410 mm	33 mm	44 mm	170 mm
45° 90°	330 mm	58 mm	345 mm	44 mm	25 mm	170 mm
90° 45°	211 mm	112 mm	244 mm	76 mm		
45° 45°	315 mm	50 mm				

- XPS work light – excellent cutline visibility, no adjustment required
- Outstanding cutting capacity of 303mm x 110mm – to meet all your application requirements
- 2 x 54V Cordless or 230V AC Power – proven power for all your needs
- High quality slide rail assembly – for long life performance
- Precision machined base and rotary table for jobsite durability
- AIR LOCK - Fully compatible allowing direct connection with DEWALT dust management system
- Stainless mitre detent lock – delivers outstanding repeatable accuracy
- Tall dual sliding fences – maximising work piece stability and accuracy

Kit Includes

- 2 x 6.0Ah 18/54V XR FLEXVOLT Battery Packs
- XR Dual Port Charger
- AC Power Adaptor

- UP TO **161 CUTS** 100 x 100mm PRESSURE TREATED PINE
- UP TO **289 CUTS** 90mm BASE MOULDING

XPS CROSS CUT POSITIONING SYSTEM

2x 54V LITHIUM ION

AIR LOCK

BRUSHLESS

ACCURACY

PRODUCTIVITY

CAPACITY

FLEXIBILITY

Includes AC Power Adaptor

RRP

23% MORE CUTS PER CHARGE

by using XR EXTREME RUNTIME Mitre Saw blades with the DHS780T2A-XE for the ultimate cutting experience. Longer life between re-sharpening.

XR EXTREME RUNTIME MITRE SAW BLADES

Part No	Blade Dia	Tooth Ct	Arbor
DT99595-QZ	305mm	60T	25.4mm
DT99566-QZ	305mm	78T	25.4mm

On average vs DT1162 in 2" x 10" Pine

Thinner Kerf, dramatically less cut force when using XR FLEXVOLT 184mm Circular Saw - DCS570

DT99577-QZ*

Diameter	184mm
Bore	20mm
Tooth Count	24
Kerf Thickness	1.55mm
Plate Thickness	0.95mm

* See local distributor for range detail.

DT99570-QZ*

Diameter	216mm
Bore	30mm
Tooth Count	60
Kerf Thickness	2.16mm
Plate Thickness	1.65mm

* See local distributor for range detail.

Thicker plate increases blade rigidity when using XR FLEXVOLT table saw - DCS7485

NEW

DCG405N-XJ

DCG406N-XJ

RRP

18V XR BRUSHLESS 125MM GRINDER

SLIDE SWITCH DCG405N-XJ
PADDLE SWITCH DCD406N-XJ

Get better performance, runtime and less service costs with DEWALT's new brushless SAG's.

- 18V Brushless motor
- Electronic Break
- Electronic Clutch
- Available in either slide switch or paddle switch

No Load Speed	9000rpm
Switch	Slide or Paddle
Vibration	6m/s²
Weight	2.5kg

18V XR BRUSHLESS 125MM GRINDER PADDLE SWITCH KIT

DCG406P2-XE

Kit Includes:

- 2 x 5.0Ah 18V XR Batteries
- Multi Voltage Charger
- TSTAK Kit Box

RRP

RRP

18V XR BRUSHLESS DIE GRINDER

DCG426N-XJ

- 760W Brushless Motor
- Variable 3 Speed delivering flexibility & control
- Mesh cover increasing durability dustproof of motor
- Thin ergonomic handle for improved comfort & control
- LED light ring improving visibility in use

FPS FIREPLUMB SUPPLIES
FIREPLUMB.COM.AU
1800 377 753

FM DAB+ Bluetooth® XR RADIO

DCR027-XE

- DAB+ and FM tuner receives digital and analogue signal
- Bluetooth® for remote streaming audio
- 3A XR charger with charge indicator LED light
- AVRCP allows you to control streaming audio from the radio
- Accepts 18V and 18/54V XR FLEXVOLT batteries
- AUX and USB in protective tech box
- Roll Cage for maximum durability

NEW

RRP

TOUGH SYSTEM RADIO

DWST1-75664-XE

- Power: AC & 18V/14.4V
- DW Battery Charger
- USB Charger
- Water & dust protection – IP54
- Bluetooth
- Inputs: USB, AUX
- Premium sound 6 speakers best in the category RMS – 40W 2 Sub-woofers
- Back light Dot Matrix pixel screen
- Radio: FM / AM DAB

RRP

RRP

18V XR LI-ION 2PC KIT 5AH

DCZ276P2-XE

- DCD796 Brushless Compact 2 Speed Hammer Drill
- DCF887 Brushless 3 Speed Impact Driver

Kit Includes:

- 2 x 5Ah 18V XR Batteries
- Multi Voltage Charger
- Small Site Bag

18V XRP LI-ION 2PC KIT 5AH TSTAK

DCK296P2T-XE

- DCD996 XRP 3 Speed Hammer Drill E-Clutch, 3-speed, 92 Nm, 2000 rpm
- DCF887 3 Speed Impact Driver 205Nm, 3800 ipm, 3-speed / torque settings

Kit Includes:

- 2 x 5Ah 18V XR Batteries
- Multi Voltage Charger
- TSTAK Deep Kit Box

RRP

18V RX LI-ION 4PC KIT 5AH

DCZ471P2-XE

- DCD796 Brushless Compact 2 Speed Hammer Drill
- DCF887 Brushless 3 Speed Impact Driver
- DCH113 18V Brushless 3 Mode SDS+ Rotary Hammer
- DCL044 18V XR LED
- Magnetic Inspection Light

Kit Includes:

- 2 x 5Ah 18V XR Batteries
- Multi Voltage Charger
- Site Bag

RRP

18V / 54V COMBO KITS

18V / 54V LI-ION 5PC KIT 6AH
DCZ596T2T-XE

RRP

- DCD996N XRP 3spd Hammer Drill
- DCF887N 3spd Impact Driver
- XR FAST Battery Charger
- DEEP TSTAK VI

54V XR FLEXVOLT
- DCS575T2 184mm Circ Saw 64mm DoC (Kit) 2 x 6.0Ah Batteries
- DCG414N125mm Angle Grinder
- DCS388N Reciprocating Saw

18V / 54V LI-ION 3PC KIT 9AH
DCZ333X2T-XE

RRP

- DCD996N XRP 3spd Hammer Drill
- DCF887N Brushless 3spd Impact Driver
- DCH333X2 54V XR FLEXVOLT 3kg SDS-PLUS (Kit) 2 x 9Ah Batteries
- XR FAST Battery Charger
- DEEP TSTAK VI

18V / 54V LI-ION 4PC KIT 9AH
DCZ441X2T-XE

- DCD996N XRP 3spd Hammer Drill
- DCF887N Brushless 3spd Impact Driver
- DCF899N18V XR Brushless 3spd High Torque Wrench
- DCG414N 125mm Angle Grinder
- DCB547 2 x 9Ah 18/54V XR FLEXVOLT Batteries
- XR FAST Battery Charger
- DEEP TSTAK VI

18V XRP LI-ION 2PC KIT 6AH
DCK296T2T-XE

- DCD996N XRP 3spd Hammer Drill
- DCF887N Brushless 3spd Impact Driver
- DCB546 2 x 6Ah 18/54V XR FLEXVOLT Battery Pack
- XR FAST Battery Charger
- DEEP TSTAK VI

18V / 54V LI-ION 3PC KIT 6AH
DCZ357T2T-XE

- DCD996N XRP 3spd Hammer Drill
- DCF887N Brushless 3spd Impact Driver
- DCS575T2 54V XR FLEXVOLT 184mm Circ Saw 64mm DoC (Kit) 2 x 6Ah Batteries
- XR FAST Battery Charger
- DEEP TSTAK VI

18V / 54V LI-ION 3PC KIT 6AH
DCZ341T2T-XE

- DCD996N XRP 3spd Hammer Drill
- DCF887N Brushless 3spd Impact Driver
- DCG414T2 54V XR FLEXVOLT 125mm Angle Grinder (Kit) 2 x 6Ah Batteries
- XR FAST Battery Charger
- TSTAK II

18V / 54V LI-ION 3PC KIT 6AH
DCZ338T2T-XE

RRP

- DCD996N XRP 3spd Hammer Drill
- DCF887N Brushless 3spd Impact Driver
- DCS388N Reciprocating Saw (Kit) 2 x 6Ah Batteries
- XR FAST Battery Charger
- TSTAK II

OUTDOOR RANGE

54V XR FLEXVOLT LINE TRIMMER
DCM5712N-XE

- Brushless motor
- 38cm Swath 2.0mm line
- Variable speed trigger
- Secondary aux handle

RRP

54V XR FLEXVOLT BLOWER
DCM572N-XE

- 400 CFM and 190km/h
- Variable Speed Trigger with lock on
- Concentrator attachment included
- Free Standing Base

54V XR FLEXVOLT CHAINSAW
DCM575N-XE

- 40cm Oregon Bar and Chain
- Up to 65 6x6 cuts per charge
- Automatic Oiling
- Tool free chain tensioning
- Variable Speed Trigger
- Instant start-up 54V on demand

FPS FIREPLUMB SUPPLIES
FIREPLUMB.COM.AU
1800 377 753

RRP

FPS FIREPLUMB SUPPLIES
FIREPLUMB.COM.AU
1800 377 753

XR FLEXVOLT KITS

PERFORM PROTECT

54V XR FLEXVOLT 3KG SDS+ HAMMER 30MM
DCH333X2-XE

The new hammer mechanism delivers 3.5J impact energy at an unrivalled speed of 0-4480 bpm.
- 3 mode versatility for hammer-drilling, drill only, and chiseling
- Extremely low vibration of 8.5m/s²
- Anti-Rotation Control

Kit Includes:
- 2 x 6.0Ah 18/54V XR FLEXVOLT Battery Packs
- XR Fast Charger
- TSTAK Kit Box

54V XR FLEXVOLT 5KG SDS MAX HAMMER 40MM
DCH481X2-XE
- Brushless 3 mode versatility for hammer-drilling, drill only and chiseling
- 6.1J impact energy at an unrivaled speed of 0-3150 bpm
- Active Vibration Control Floating handle with vibration of 8.5m/s²
- Anti-Rotation Control

Kit Includes:
- 2 x 6.0Ah 18/54V XR FLEXVOLT Battery Packs
- XR Fast Charger
- Heavy-duty Kit Box

54V XR FLEXVOLT 125MM ANGLE GRINDER
DCG414T2-XE
- Powerful Brushless Motor
- Power of Corded 1500W Motor
- Safety electronic brake & clutch
- Durability abrasion protected motor
- Ergonomics one tough guard

Kit Includes:
- 2 x 6.0Ah 18/54V XR FLEXVOLT Battery Packs
- XR Fast Charger
- TSTAK Kit Box

VISIT
GUARANTEEDTOUGH.COM.AU
TO REDEEM TODAY

54V XR FLEXVOLT PLUNGE SAW
DCS520T2-XE
- Powerful Brushless Motor
- 47° bevel giving extra capacity in fine finish applications
- 165mm blade with 55mm cut depth
- AIR LOCK - Fully compatible
- Low friction strip

Kit Includes:
- 1.5m rail
- 2 x 6.0Ah 18/54V XR FLEXVOLT Battery Packs
- XR Fast Charger
- TSTAK Kit Box

2 x 54V XR FLEXVOLT 305MM SLIDING MITRE SAW
DHS780T2A-XE

Unprecedented power & cut capacity with the freedom of cordless technology. Revolutionary AC/DC powered from either 2 x 54V DEWALT XR FLEXVOLT Battery Packs for jobsite freedom or the AC Mains Adaptor for workshop use. DEWALT XR FLEXVOLT tools offer the professional tradesperson the Power of corded. Freedom of cordless.

Kit Includes:
- 2 x 6.0Ah 18/54V XR FLEXVOLT Battery Packs
- XR Dual Port Charger
- AC Power Adaptor

54V XR FLEXVOLT CIRCULAR SAW
DCS575T2-XE

The DCS575 is the new, leading precision Circular Saw.
- Powerful Brushless Motor
- Heavy Duty 64mm Depth of Cut
- Speed 5800RPM Motor
- AIRLOCK compatible dust extraction
- Dedicated EXTREME RUNTIME Blade

Kit Includes:
- 2 x 6.0Ah 18/54V XR FLEXVOLT Battery Packs
- XR Fast Charger
- TSTAK Kit Box

54V XR FLEXVOLT RECIPROCATING SAW
DCS388T2-XE
- Powerful Brushless Motor
- Power of Corded Unit
- Speed 0-3000 SPM
- Vibration best in class 12m/s²
- Ergonomic front & rear handle

Kit Includes:
- 2 x 6.0Ah 18/54V XR FLEXVOLT Battery Packs
- XR Fast Charger
- Heavy-duty Kit Box

XR FLEXVOLT

POWER OF CORDED | FREEDOM OF CORDLESS

WHY DEWALT XR FLEXVOLT?

Any 18V system has a limit to the amount of power it can deliver. DEWALT XR FLEXVOLT tools surpass the limits of an 18V system, delivering unprecedented levels of power. This power opens up new applications on a cordless platform and also makes existing applications quicker. The faster application speed means that despite the higher voltage, less energy is used overall. This improves runtime on heavy duty tasks.

WHAT ARE XR FLEXVOLT BATTERIES?

XR FLEXVOLT batteries are 18V batteries that switch up to 54V when placed on a XR FLEXVOLT tool. They are fully compatible with the entire 18V XR range, including chargers.

Standard XR batteries have 5 x 3.6V (18V) cells connecting in a series and either one or two strings in parallel, giving either an 18V 2Ah or an 18V 5Ah battery.

The DCB546 (6Ah) and the DCB547 (9Ah) XR FLEXVOLT batteries are flexible. They connect in parallel for 18V tools and in a series for 54V tools.

AVAILABLE IN 6AH & 9AH

FPS FIREPLUMB SUPPLIES
FIREPLUMB.COM.AU
1800 377 753

18V XR LI-ION 6PC COMBO KIT - 5.0AH TOOL CONNECT BLUETOOTH® KIT
DCK696P2B-XE

- DCD996 XRP 3spd Hammer Drill
- DCF887 Brushless 3spd Impact Driver
- DCS380 Reciprocating Saw
- DCS391 Circular Saw
- DCG412 125mm Angle Grinder
- DCR006 Bluetooth Worksite Speaker

Kit includes:

- 2 x 5.0Ah 18V XR Li-Ion Bluetooth Batteries
- Multi Voltage Charger
- 2 x TOUGHSYSTEM Kit Boxes

18V XR LI-ION 5PC COMBO KIT - 5.0AH
DCZ594P2-XE

- DCD796 Brushless Hammer Drill
- DCF887 Brushless 3spd Impact Driver
- DCS387 Reciprocating Saw
- DCG412 125mm Angle Grinder
- DCL040 LED Pivot Light

Kit includes:

- 2 x 5.0Ah 18V XR Batteries
- Multi Voltage Charger
- TSTAK Kit Box

18V XR LI-ION 4PC COMBO KIT - 5.0AH
DCK451P2-XE

- DCD796 Brushless Hammer Drill
- DCF887 Brushless 3spd Impact Driver
- DCS380 Reciprocating Saw
- DCS391165mm Circular Saw

Kit includes:

- 2 x 5.0Ah 18V XR Batteries
- Multi Voltage Charger
- TOUGHSYSTEM Kit Box

18V XR LI-ION 2PC COMBO KIT - 5.0AH
DCK276P2-XE

- DCD996 XRP Hammer Drill Driver
- DCF887 Impact Driver

Kit includes:

- 2 x 5.0Ah 18V XR Batteries
- Multi Voltage Charger
- Side Handle
- TOUGHSYSTEM Kit Box

VISIT
GUARANTEEDTOUGH.COM.AU
TO REDEEM TODAY

18V XR LI-ION 3PC BRUSHLESS COMBO KIT - 5.0AH
DCK397P2-XE

- DCD796 Brushless Hammer Drill
- DCF887 Brushless 3spd Impact Driver
- DCH274 Brushless Rotary Hammer

Kit includes:

- 2 x 5.0Ah 18V XR Batteries
- Multi Voltage Charger
- TSTAK Kit Box

18V XR LI-ION 4PC COMBO KIT - 5.0AH
DCK399P2-XE

- DCD796 Brushless Hammer Drill
- DCF887 Brushless 3spd Impact Driver
- DCF899 Brushless High Torque 1/2" Impact Wrench
- DCG412 125mm Angle Grinder

Kit includes:

- 2 x 5.0Ah 18V XR Batteries
- Multi Voltage Charger
- TSTAK Kit Box

18V XR LI-ION 3PC COMBO KIT - 5.0AH
DCK393P2-XE

- DCD796 Brushless Hammer Drill
- DCF880 1/2" Impact Wrench
- DCG412 125mm Angle Grinder

Kit includes:

- 2 x 5.0Ah 18V XR Batteries
- Multi Voltage Charger
- TSTAK Kit Box

18V XR LI-ION 3PC COMBO KIT - 5.0AH
DCZ391P2-XE

- DCD796 Brushless Hammer Drill
- DCF887 Brushless 3spd Impact Driver
- DCG412 125mm Angle Grinder

Kit includes:

- 2 x 5.0Ah 18V XR Batteries
- Multi Voltage Charger
- TSTAK Kit Box

GET THE POWER YOU NEED
FROM OUR 18V XR RANGE
100+ PRODUCTS OUR FASTEST GROWING SYSTEM
18V LI-ION XR BRUSHLESS
www.DEWALT.com

BATTERY VERSION
ON PAGE 14

FPS FIREPLUMB SUPPLIES
FIREPLUMB.COM.AU
1800 377 753

PipeCut 170

Lightweight and handy

WEIGHT	RANGE OF USE	MAX PIPE WALL	SUITABLE FOR	VOLTAGE
12 LBS	∅ 0.6”– 6.7”	STEEL 0.23” / PLASTIC 0.55”	ALL MATERIALS	220 –240V/50–60 Hz

PipeCut 170E

Powerfull and lightweight

WEIGHT	RANGE OF USE	MAX PIPE WALL	SUITABLE FOR	VOLTAGE
12 LBS	∅ 0.6” – 6.7”	STEEL 0.31” / PLASTIC 0.55”	ALL MATERIALS	110–120V/50–60 Hz 220–240V/50–60 Hz

PipeCut 170

I Voltage/Power/Current	220–240 V | 1010 W | 4.7 A
II Voltage/Power/Current	Available only as 220–240V version
No-Load speed	4000 r/min
Blade diameter	5.51”
Mounting bore	2.44”
Automatic fuse	



Lightweight and handy PipeCut 170
has a wide cutting range even it weighs only 12 lbs. PipeCut 170 can be used for cutting both metal and plastic pipes. It is very comfortable and light to use and it cuts the pipes extremely fast.

PRICE INCLUDES:
PipeCut 170 pipe saw, TCT 140 blade, Shoulder bag, Pipe support x 4, Instructions, Allen keys, DVD-video.

BLADES/DISCS FOR PipeCut 170 - see more on page 18

PipeCut 170E

I Voltage/Power/Current	220–240 V | 1200 W | 5.6 A
II Voltage/Power/Current	110–120 V | 1010 W | 9.2 A
No-Load speed	1600–3500 r/min
Blade diameter	5.51”
Mounting bore	2.44”
Speed preselection	



Powerful, lightweight and handy PipeCut 170E
can be used for cutting both metal and plastic pipes. Because of its adjustable speed and steady torque feature it is ideal for cutting stainless steel and cast iron pipes. It offers hi end performance for pipe fabrication professionals.

PRICE INCLUDES:
PipeCut 170E pipe saw, TCT 140 blade, Shoulder bag, Pipe support x 4, Instructions, Allen keys, DVD-video.

BLADES/DISCS FOR PipeCut 170E - see more on page 18

FPS FIREPLUMB SUPPLIES
FIREPLUMB.COM.AU
1800 377 753

PipeCut 220E

Wide cutting capacity

WEIGHT	RANGE OF USE	MAX PIPE WALL	SUITABLE FOR	VOLTAGE
13 LBS	0.6”–8.6”	STEEL 0.23” / PLASTIC 0.55”	ALL MATERIALS	110–120V/50–60 Hz 220–240V/50–60 Hz

PipeCut 280E

Most effective pipe cutting

WEIGHT	RANGE OF USE	MAX PIPE WALL	SUITABLE FOR	VOLTAGE
20 LBS	1.6”–11”	STEEL 0.4” / PLASTIC 1.5”	ALL MATERIALS	110–120V/50–60 Hz 220–240V/50–60 Hz

PipeCut 220E

I Voltage/Power/Current	220–240 V	1200 W | 5.6 A
II Voltage/Power/Current	110–120 V	1010 W | 9.2 A
No-Load speed	1600–3500 r/min	
Blade diameter	5.51”	
Mounting bore	2.44”	
Speed preselection		

Power, plus a wide cutting capacity with PipeCut 220E
It can be used for cutting both metal and plastic pipes; the machine has adjustable motor speed and constant torque. Because of its robust design it is ideal for use in both the workshop or on site for a multitude of different pipe applications.



PRICE INCLUDES:
PipeCut 220E pipe saw, TCT 140 blade, Shoulder bag, Pipe support x 4, Instructions, Allen keys, DVD-video.

BLADES/DISCS FOR PipeCut 220E - see more on page 18



PipeCut 280E

I Voltage/Power/Current	220–240 V	1750 W | 8.0 A
II Voltage/Power/Current	110–120 V	1700 W | 15.0 A
No-Load speed	1 = 2900 r/min	
	2 = 3900 r/min	
Blade diameter	6.50”	
Mounting bore	2.44”	
Speed preselection		

Most effective pipe cutting with the powerful PipeCut 280E
It is ideal for cutting metal pipes because of it’s two speed selection, automatic fuse and torque control. It works well even with the hardest die cast iron pipes. It is also suitable for cutting plastic pipes because it can cut very thick pipe walls and it can be attached to a vacuum cleaner when cutting plastic pipe material.



PRICE INCLUDES:
PipeCut 280E pipesaw, TCT 165 blade, Shoulder bag, Pipe support x 4, Instructions, Allen keys, DVD-video.

BLADES/DISCS FOR PipeCut 280 - see more on page 18